



FIBERGLASS ENTRY DOOR

By A. J. Manufacturing, Inc.



Composite Frame

Available with:

STANDARD FLUSH, NO LITE

9-LITE FLUSH PANEL

1-LITE FLUSH PANEL

9-LITE 2-PANEL

1-LITE 2-PANEL

6-PANEL

The FGx Door Series, from A.J. Manufacturing.

In the constant drive to incorporate unique materials, elevated performance standards, and increased responsibility to the environment, we are proud to bring the first purpose-built fiberglass door to the Post Frame market, the **FGx** series. This door incorporates all of the style and performance of fiberglass with the durability, features, and thermal performance you have come to expect from the complete line of doors from A.J. The next time you are working with a building owner who knows what they need, share the story of the **FGx** door and demonstrate the value only available from A.J. They will feel the quality of our products each and every time they enter or exit the building you have constructed for them.



Building Ideas






FIBERGLASS ENTRY DOOR

Thermally broken fiberglass woodgrain textured panel prehung in a 4-9/16" composite frame with three stainless steel 4" x 4-1/2" fixed pin hinges.

Features & Benefits

- U-Factor = .15 for outswing and .14 for inswing.
- Prehung 4-way universal swing.
- 1-3/4" thermally broken door panel pressure injected with polyurethane foam.
- Door is prepped for lockset with a 2-1/8" diameter hole with a 2-3/4" backset and a 1" edge bore.
- Frame header, parting stop and sill are polyester painted and baked for a durable and long lasting appearance.
- Master frame is prefinished brite white composite; shipped assembled with hinges and door attached.
- A unique design allows the weatherstripped header parting stop to be snapped in place after the door has been installed to insure a weather tight installation.
- Bottom sill sweep is fabricated of a dual durometer vinyl consisting of three flexible wands, two bulbs and a rigid base.
- Sill is a low profile design, which complies with ADA handicap accessible guidelines. It is 4-9/16" deep and 1/2" high.
- Each door is securely packaged in a corrugated carton.
- Door is mounted to the frame by three, 12 ga stainless steel, 4" x 4-1/2" fixed pin hinges.
- Master frame is weatherstripped with bulb and leaf gasket.
- Brick mold option available.

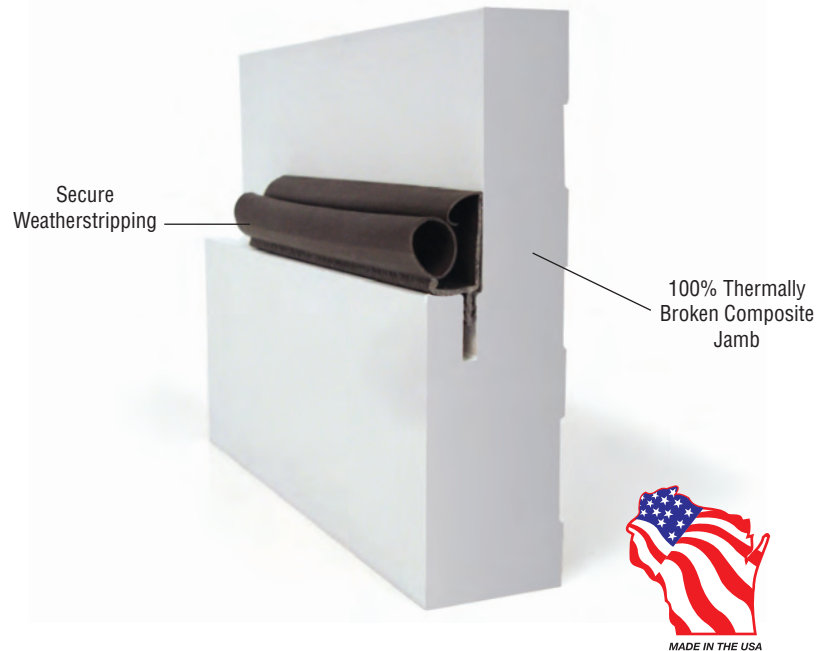

Six Panel Options

- Standard panel, no lite.
- 22" x 36" 9-Lite insulated tempered glass.
- 22" x 36" 6-Lite insulated tempered glass.
- 9-Lite 2-panel.
- 1-Lite 2-panel.
- 6-panel, no lite.

Rough opening: 38" x 81-3/8"

Why Select the FGx from A.J.

1. Molded woodgrain textured, virtually *maintenance free* panel.
2. High definition fiberglass skin with a polyurethane core *will not dent*.
3. *100% thermally broken*; composite jamb, fiberglass panel with a foam core for an industry leading thermal performance.



All FGx Doors backed with accutrac™ by A.J.:

- 100% order confirmation
- Daily shipment notification
- Online tracking of open and shipped orders



A. J. Manufacturing, Inc.
1217 Oak Street
Bloomer, WI 54724
1-800-328-9448 • 715-568-2204
www.ajdoor.com

Building Ideas

Warranty

A. J.'s FGx Door is designed and manufactured with quality materials and workmanship. The 5 year warranty applies to defective materials or workmanship. The warranty commences from the date of manufacture. At A. J.'s discretion, replacement or repair of product will be provided. Expenses associated with transportation and installation costs are at the owner's expense.

Not prepped for panic or closer hardware.