



# PREHUNG 4 WAY-UNIVERSAL WALK DOORS 3100—3700

Available In: Standard • Vue Lite • 9-Lite • Crossbuck with 9-Lite



## Count on A.J. Manufacturing

Time tested performance built into every door. The fully weather-stripped aluminum frame, 4"x 4-1/2" zinc coated hinges, foamed panel and the industries best warranty deliver durability and performance year after year.

### Features & Benefits: (all doors)

- Prehung 4-way universal
- 1-3/4" thick door panel
- Pressure injected with 2.2 pounds of polyurethane foam per cubic foot
- R-12 insulation value
- White panels and jambs
- Rolled edge door panel

## Warranty

A.J.'s Prehung 4 Way-Universal Walk Doors are designed and manufactured with quality materials and workmanship. The 5 year warranty applies to defective materials or workmanship. The warranty commences from the date of manufacture. At A.J.'s discretion, replacement or repair of product will be provided. Expenses associated with transportation and installation costs are at the owner's expense.



# PREHUNG 4 WAY-UNIVERSAL WALK DOORS 3100—3700

## Prehung four-way universal swing entry door fin/J-channel jamb

### 3100

- 28 gauge embossed steel skin
- Woven polypropylene pile weather-stripping

### 3150

- 3100 panel in an aluminum nailing fin/J-channel jamb

### 3700

- 24 gauge smooth steel skin
- Woven polypropylene pile weather-stripping
- Panel available with crossbuck stamped design

### 3750

- 3700 panel in aluminum nailing

### Additional Features:

- Prepainted with two coats of polyester paint for a durable and long lasting finish
- Door is mounted to the frame by three 12-gauge steel, 4-1/2" x 4" fixed pin hinges
- Hinges zinc plated for rust resistance
- 2'4" to 4'0" widths and double doors standard
- Prehung door individually cartoned
- Designed for steel, masonry and wood construction
- All lites are aluminum framed and foamed in place

### DOOR CONSTRUCTION

28 gauge hot dipped galvanized embossed steel panels  
24 gauge hot dipped galvanized smooth steel panels  
Panel strengthened with c-channel at entry lock

### WEATHER-STRIPPING

Master Frame weather-stripped with woven polypropylene pile

### PANEL OPTIONS

Standard Panel, No Lite

22"x 22" vue lite fabricated of single glazed 1/8" tempered glass

22"x 36" one lite sealed insulated glass consisting of two of pieces 1/8" tempered glass

22"x 36" nine lite sealed insulated glass consisting of two pieces 1/8" tempered glass with a rigid aluminum grid system

22" x 22" insulated vue lite consisting of two pieces 1/8" tempered glass


### COLORS

White, painted jamb and panel

	3100	3700
Standard Panel, No Lite	■	
22"x 22" vue lite	■	■
22"x 36" one lite	■	■
22"x 36" nine lite	■	■
22" x 22" insulated vue lite	■	■
22" x 26" crossbuck nine lite	■	■

Standard Jamb  
(3100, 3700)

Nailing Fin  
J-channel Jamb  
(3150 and 3750)

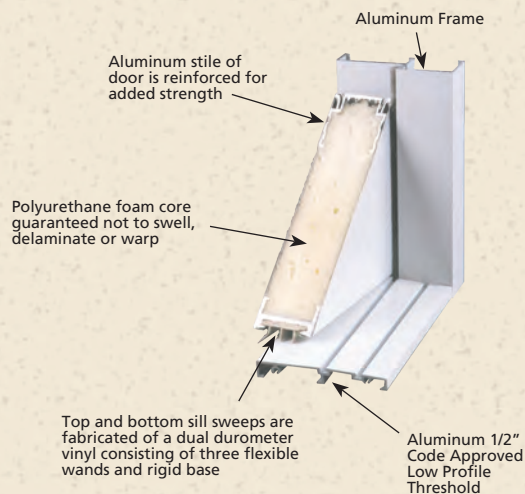

A.J. Manufacturing, Inc.  
1217 Oak Street  
Bloomer, WI 54724  
1-800-328-9448 • 715-568-2204  
www.ajdoor.com

**Building Ideas**



**Standard (flush)**



**Vue Lite (22"x 22")**



**9-Lite (22"x 26")**



**Crossbuck 9-Lite**