



STAINLESS STEEL RESPONDER DOOR™

Available In:
Standard
Vue Lite
1-Lite

16 ga Stainless Steel
Frame



**Perfect for Dairy Facilities, Food Processing Plants, or
any demanding environment!**



Quality Crafted Entry Doors And Windows

By AJ Manufacturing



STAINLESS STEEL RESPONDER DOOR™

Smooth skin stainless steel panel prehung in a 16 ga stainless steel frame with three 12 ga stainless steel, 4-1/2" x 4" fixed pin hinges.




Features & Benefits

- Prehung, insulated leaf with mill finished aluminum header and sill.
- 1-3/4" thick door pressure injected with polyurethane foam - R11 insulation value.
- 24 ga stainless steel exterior.
- Premium smooth steel panels.
- Flush design - cakepan panel for style, strength, and corrosion resistance.
- Door is prepped for lockset by boring a 2-1/8" diameter hole with a 2-3/4" backset and a 1" edge bore.
- Door panel is strengthened with a Steel C-Channel at the location for entry lock.
- Master frame is shipped completely assembled with hinges and door attached.
- A unique design allows the weatherstripped header parting stop to be snapped in place after the door has been installed to insure a weather tight installation.
- Top and Bottom sill sweeps are fabricated of a dual durometer vinyl consisting of three flexible wands and a rigid base.
- Sill is a low profile design, which complies with ADA handicap accessible guidelines. It is 3-1/2" deep and 1/2" high.
- Each door is individually cartoned.

Steel Frame: Series R51

- Frame jamb is fabricated of 16 ga stainless steel.
- Door is mounted to the frame by three, 12 ga stainless steel, 4-1/2" x 4" fixed pin hinges.
- Master frame is weatherstripped with bulb gasket.

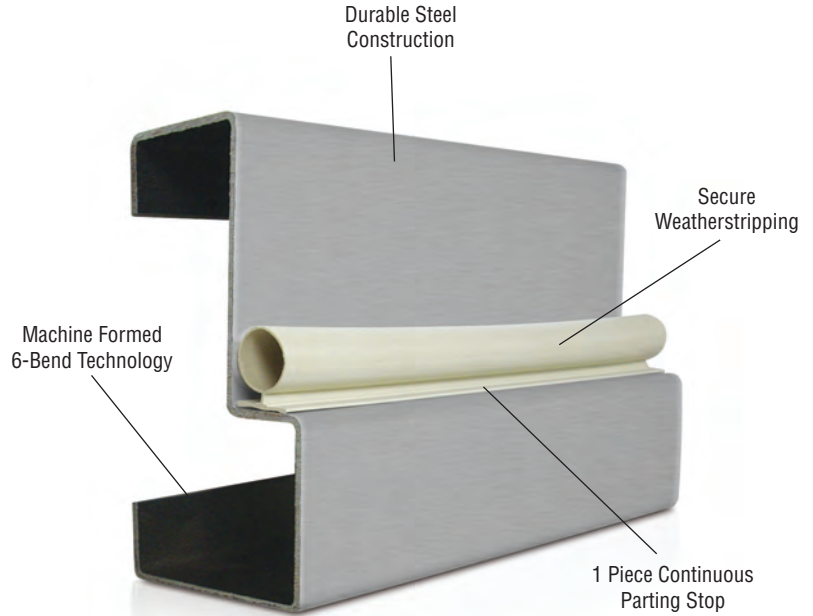

Panel Options

- Standard panel, no lite.
- 22" x 22" Vue Lite insulated or single-glazed tempered glass.
- 22" x 36" 1-Lite insulated tempered glass.



AJ Manufacturing, Inc
1217 Oak Street
Bloomer, WI 54724
1-800-328-9448 • 715-568-2204
www.ajdoor.com

Warranty

AJ's Stainless Steel Responder Door™ is designed and manufactured with quality materials and workmanship. The 5 year warranty applies to defective materials or workmanship. The warranty commences from the date of manufacture. At AJ's discretion, replacement or repair of product will be provided. Expenses associated with transportation and installation costs are at the owner's expense.